





Adam Tas Corridor Energy

PAM4 Optical Transceiver Module for Austrian Overseas Warehouse

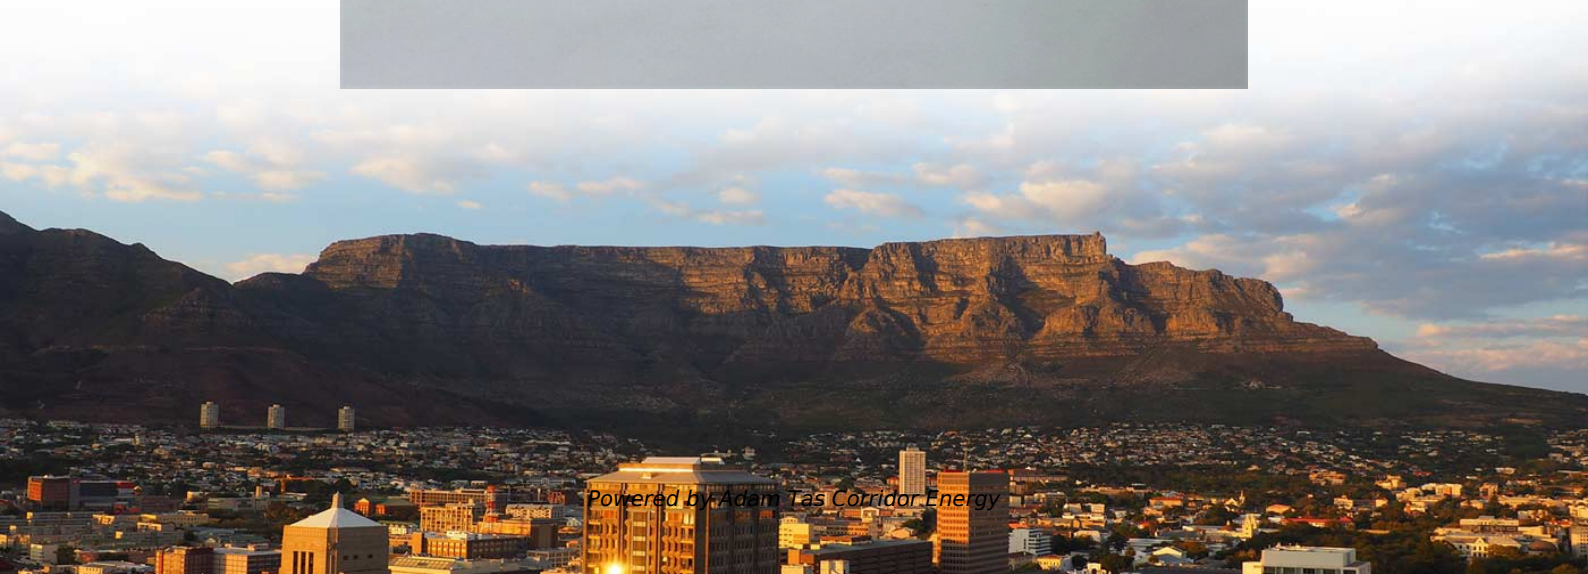

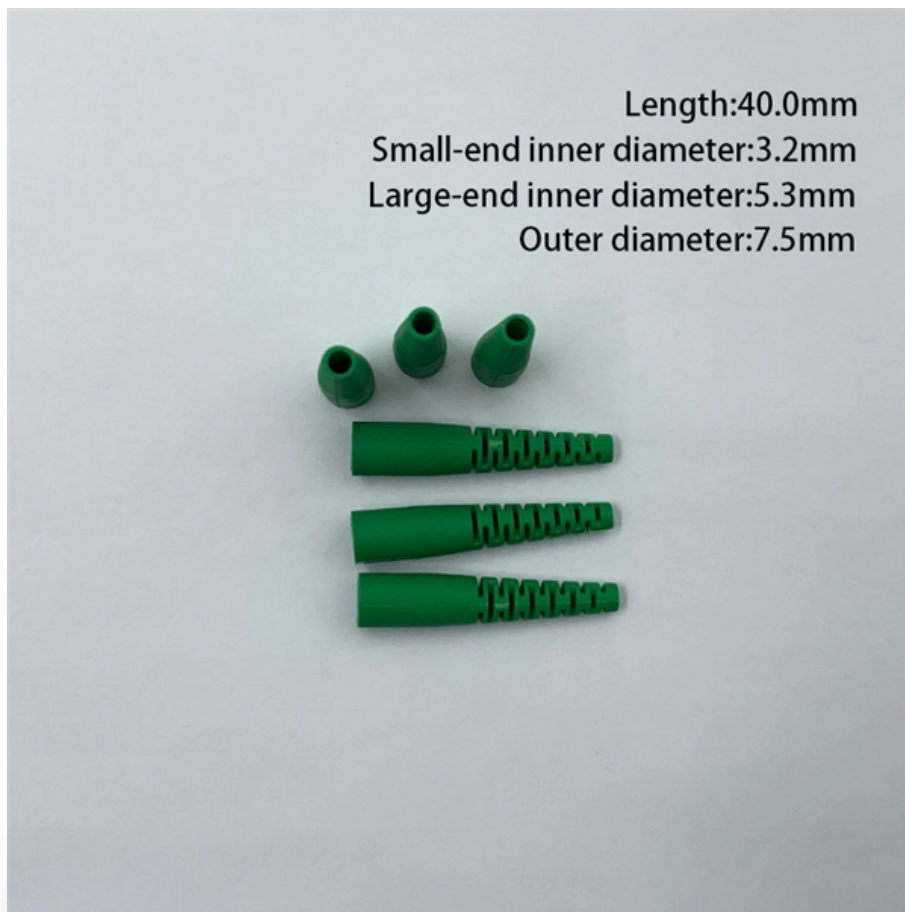

PAM4 Optical Transceiver Module for Austrian Overseas Warehouse



Generic Compatible 100GBASE-LR QSFP28 Single

100GBASE-LR Single Lambda QSFP28 PAM4 Optical Transceiver Module (Single Lambda, SMF, 1310nm, 10km, LC, DOM) The 100GBASE-LR Single Lambda

NVIDIA/Mellanox Compatible 400GBASE-SR8 OSFP Finned Top

The 400GBASE-SR8 OSFP module, MTP/MPO-16 connector, up to 100m over parallel OM4 multi-mode fibre. It is compliant with OSFP MSA, IEEE 802.3cd protocol and 400GAUI-8 standards.



400GBASE-LR8 QSFP-DD PAM4 1310nm 10km DOM Duplex LC/UPC SMF Optical

Generic Compatible 400GBASE-LR8 QSFP-DD PAM4 Optical Transceiver Module (SMF, 1310nm, 10km, LC, DOM) The 400GBASE-LR8 module, Duplex LC connector, up to 10km over parallel single

Cisco QSFP-400G-DR4 Compatible 400GBASE-DR4

Cisco QSFP-400G-DR4 Compatible 400GBASE-DR4 QSFP112 PAM4 Optical Transceiver Module



(SMF, 1310nm, 500m, MPO-12/APC, DOM) The Cisco




Length:40.5mm
Small-end inner diameter:2.0mm
Large-end inner diameter:6.0mm
Outer diameter:7.5mm

Generic Compatible 400GBASE-DR4 QSFP112 PAM4 1310nm 500m

Generic Compatible 400GBASE-DR4 QSFP112 PAM4 1310nm 500m DOM MPO-12/APC SMF Optical Transceiver Module, Breakout to 4 x 100G-DR

NVIDIA MMA4Z00-NS400 Compatible 400GBASE SR4

The module converts 4 channels of 100Gb/s (PAM4) electrical

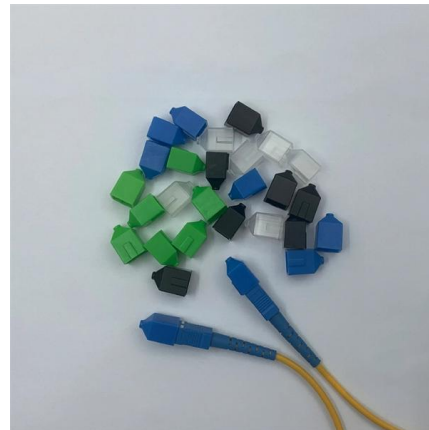

NVIDIA MMS4A00 1600Gbps, 2xDR4, Twin-port OSFP,

The NVIDIA MMS4A00 is a 1600Gb/s 2xDR4, single mode optical transceiver supporting the XDR 800Gb/s InfiniBand protocol. The line rate is





400GBASE-LR4 QSFP-DD PAM4 1310nm 10km DOM Duplex LC/UPC SMF Optical

400G-LR4 QSFP-DD PAM4 Optical Transceiver Module (SMF, 1310nm, 10km, LC, DOM) The 400GBASE-LR4 module, Duplex LC connector, up to 10km over parallel single-mode fiber. It is



High Performance Active Optics & Passive Optics

Samtec's FireFly(TM) Micro Flyover System(TM) embedded and rugged mid-board optical transceivers take data connection "off board" for up to 28 Gbps per lane with a

NVIDIA/Mellanox MMA4Z00-NS400 400G OSFP SR4

NVIDIA MMA4Z00-NS400 (980-9I51S-00NS00) compatible OSFP 400G SR4 MMF module, ensuring stable 400G InfiniBand NDR and Ethernet transmission up to 50m.



NVIDIA/Mellanox MMS1X00-NS400 Compatible 400GBASE-DR4 QSFP112 PAM4

NVIDIA/Mellanox MMS1X00-NS400 Compatible 400GBASE-DR4 QSFP112 PAM4 1310nm 500m DOM MPO-12/APC SMF InfiniBand NDR Optical Transceiver Module for ConnectX-7 HCA



400G Optical Transceiver Based on PAM4 Modulation

Discover the application of PAM4 modulation in 400G transceivers, including multi-mode and single-mode options, and the future trends in optical transceivers.




Optical Clock Recovery (OCR) Modules

MACOMs Optical Clock Recovery (OCR) modules provide clock recovery capabilities for both optical non-return-to-zero (NRZ) and pulse-amplitude-modulation (PAM4)

MATP-10025

The MACOM PRISM(TM) MATP-10025 device is a 100 Gbps PAM-4 PHY with integrated DSP and multiplexing functionality designed to enable single-wavelength 100 Gbps optical transceiver solutions.





NVIDIA/Mellanox MMS4X00-NM Compatible 800GBASE 2xDR4/DR8

The 800GBASE-DR8 OSFP optical transceiver module is designed for 800GBASE Ethernet throughput up to 500m link lengths over OS2 single-mode fiber (SMF) using a wavelength of 1310nm via dual

NVIDIA/Mellanox MMA4Z00-NS Compatible 800GBASE

NVIDIA/Mellanox MMA4Z00-NS Compatible 800GBASE 2xSR4/SR8 OSFP Finned Top PAM4 850nm 50m DOM Dual MPO-12/APC MMF Ethernet Optical



Customized 400GBASE-DR4 OSFP Finned Top PAM4

The OSFP optical transceiver module is designed for 400GBASE Ethernet throughput up to 500m link lengths over OS2 singlemode fibre (SMF) using a


400G XDR4 QSFP-DD , Broadex Technologies

8*53.125Gbps (PAM4) electrical interface (400GAUI-8), 4*106.25Gbps (PAM4) optical interface (1*12 APCMPO) Up to 500m or 2km transmission on single



OSFP 800GBASE-DR8 Finned Top PAM4 1310nm

OSFP 800GBASE-DR8 Finned Top PAM4 1310nm 500m DOM Dual MPO-12/APC SMF Optical Transceiver Module, Support 2 x 400G-DR4/DR4 and 8 x 100G-DR

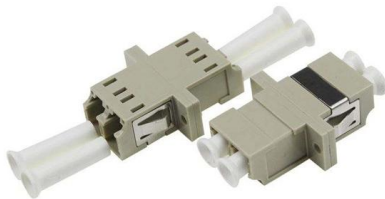

Cisco QSFP-400G-DR4 Compatible 400GBASE-DR4

The Cisco compatible QSFP112 optical transceiver is an 400Gb/s single-port QSFP112, DR4 single-mode parallel transceiver using a single, 4-channel MPO



Strengthen door locks
More durable and aesthetically pleasing



Grounding screw
More aesthetically pleasing and safer



Removable hinges
Make operation more convenient



Sealing strip
Dustproof and waterproof

NVIDIA/Mellanox Compatible 400GBASE-DR4 OSFP RHS/Flat Top 4 x 100G PAM4

NVIDIA/Mellanox Compatible OSFP 400G DR4 PAM4 Ethernet Optical Transceiver (SMF, 1310nm, 500m, MPO-12/APC, DOM, RHS/Flat Top) The 400G DR4 OSFP Optical Transceiver is an



Cisco Compatible 400GBASE-ER4L QSFP-DD PAM4

The 400GBASE-ER4L module, Duplex LC connector, up to 30km over parallel single-mode fibre with 400G KP4 FEC. It is compliant to IEEE 802.3bs protocol



MMA4Z00-NS400 400Gb/s Single-port OSFP 400Gb/s Multimode

1 Introduction The NVIDIA MMA4Z00-NS400 is an InfiniBand (IB) and Ethernet (ETH) 400Gb/s, Single-port, OSFP, SR4 multimode parallel transceiver using a single, 4-channel MPO-12/APC optical

NVIDIA/Mellanox MMS4A00 Compatible 1.6T 2xDR4/DR8 OSFP Flat Top PAM4

NVIDIA/Mellanox MMS4A00 Compatible 1.6T 2xDR4/DR8 OSFP Flat Top PAM4 1310nm 500m DOM Dual MPO-12/APC SMF InfiniBand XDR Optical Transceiver Module for Liquid-Cooled Switches



Contact Us

For datasheets, pricing, or custom telecom energy solutions, please visit:
<https://koskolong.co.za>